


Interlaced Bow Top

PCD02

Our traditional solid bar bow top railings are made to exceed the standards of BS 1772 pt9. Attractive as ornamental fencing, bow top railings can also provide a medium security solution provided the height is sufficient.

There are several standard patterns available and non-standard variations can also be supplied. As standard, the railings and posts are galvanised but we also over a wide range of polyester powder coated finishes.

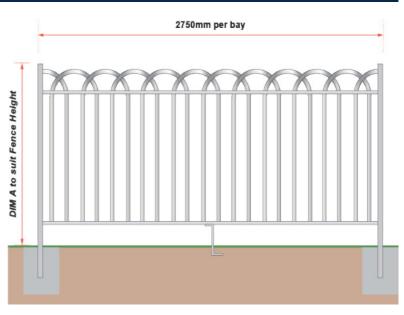

*Matching Swing or Sliding Gates can be Supplied



Product Data

| Railing Height | Post Section | Top & Bottom Rail | Bows |
|----------------|----------------|-------------------|----------------------|
| 1.0 M | 50 x 50 mm SHS | 40 x 10 mm Flat | Minimum 10mm Dia Rod |
| 1.2 M | 50 x 50 mm SHS | 40 x 10 mm Flat | Minimum 10mm Dia Rod |
| 1.5 M | 50 x 50 mm SHS | 40 x 10 mm Flat | Minimum 12mm Dia Rod |

| Finish | Hot dip Galvanised to BS EN ISO 1461:2009 and polyester coated to a range of RAL |
|--------|--|
| | colours. |



Contracts Offices: Garforth (W.Yorkshire) - Bedwas (S.Wales) - Brentwood (Essex)

T: 02920 855 756 E: enquiries@proctercontracts.co.uk W: www.proctercontracts.co.uk

Applications